


# d-flexx




## Specifications

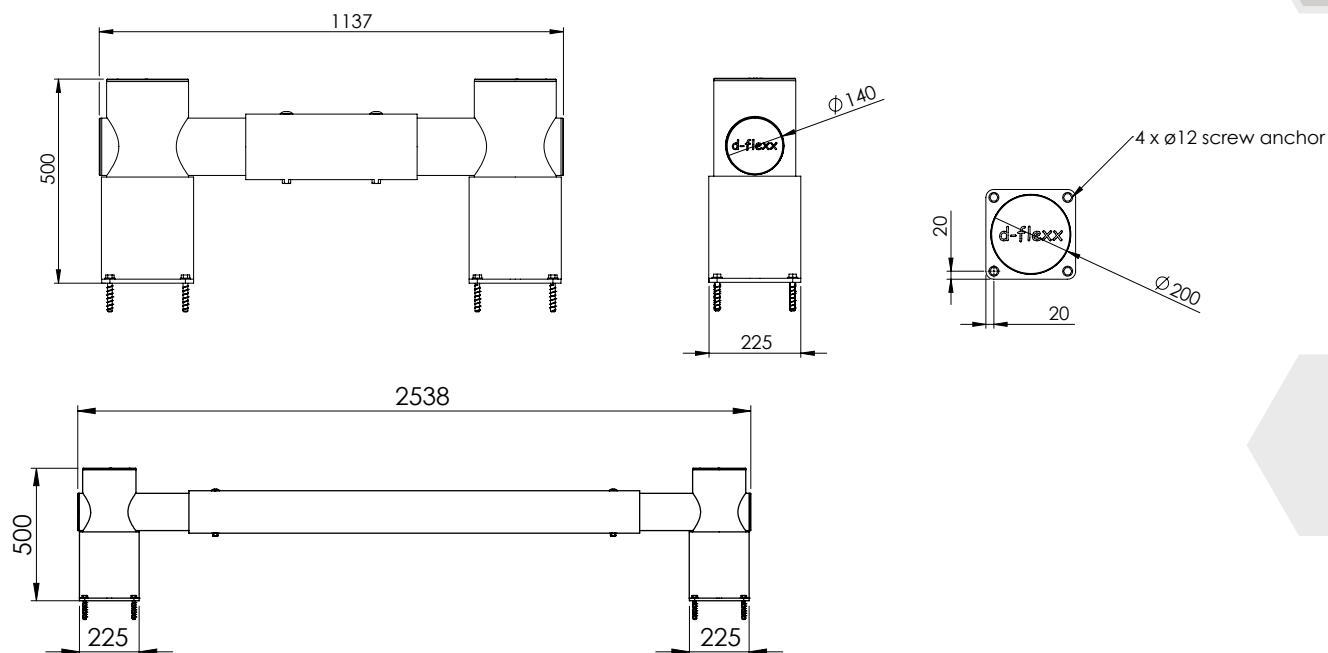


## Measurements mm vs in

|                  | mm   | in    |
|------------------|------|-------|
| Diameter 1       | 200  | 7,87  |
| Diameter 2       | 140  | 5,51  |
| Height           | 500  | 19,69 |
| Width 1          | 1137 | 44,72 |
| Width 2          | 2538 | 99,92 |
| Footplate        | 225  | 8,86  |
| Pos. drill holes | 20   | 0,79  |

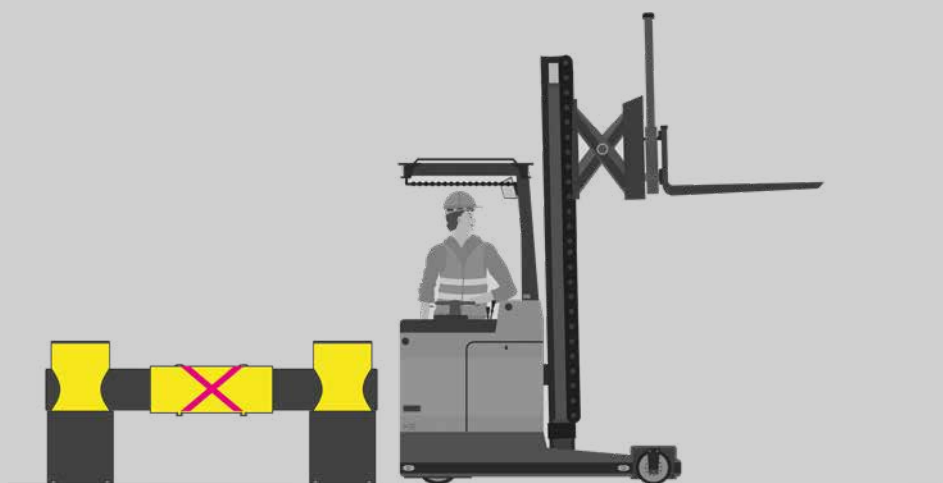

## Max. force to bolt 21 kN

## Impact Test GOLF single rail

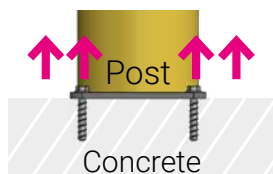

| Mid Rail Max. Energy (Joules) | 90°   | 67,5° | 45°    | 22,5°  |
|-------------------------------|-------|-------|--------|--------|
|                               | 7.000 | 8.200 | 14.000 | 47.900 |

End post max. energy (Joules) - 90° 4.000




## Sprzedaz i serwis

ul. Marecka 66a  
05-220 Zielonka  
+48 22 771 04 56  
info@topserw.pl  
www.topserw.pl

# d-flexx




## Specifications

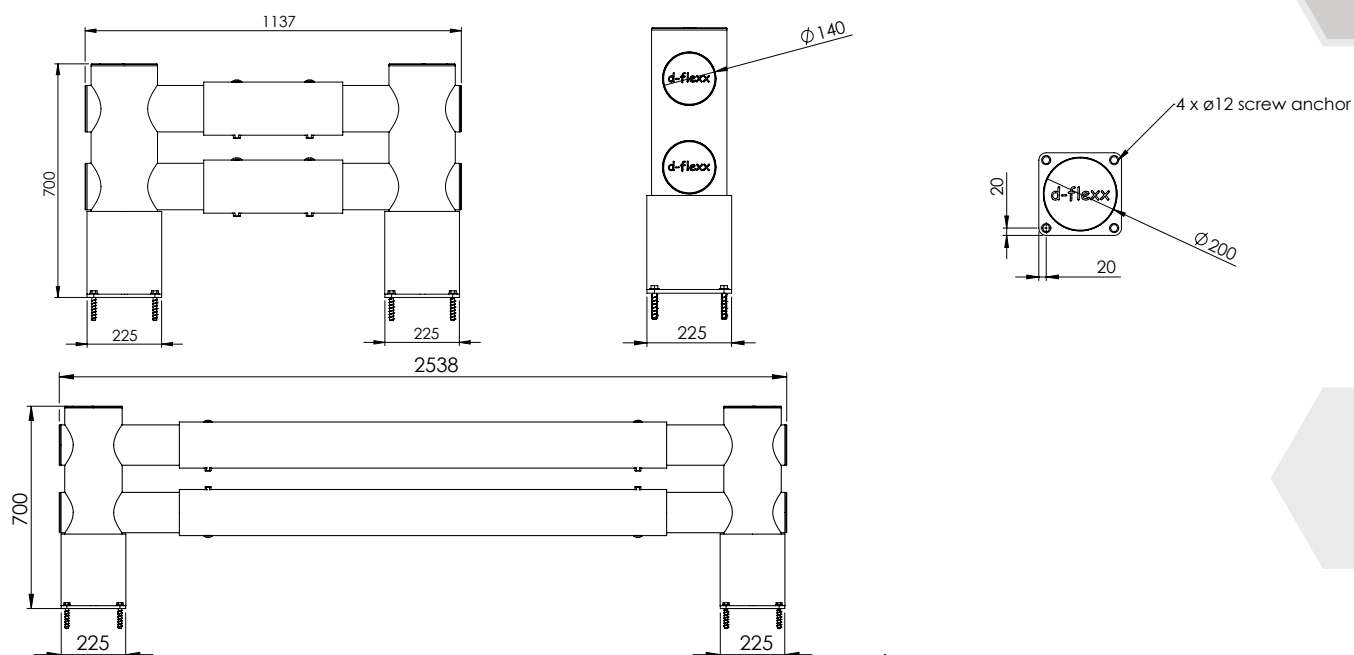


## Measurements mm vs in

|                  | mm   | in    |
|------------------|------|-------|
| Diameter 1       | 200  | 7,87  |
| Diameter 2       | 140  | 5,51  |
| Height           | 700  | 19,69 |
| Width 1          | 1137 | 44,72 |
| Width 2          | 2538 | 99,92 |
| Footplate        | 225  | 8,86  |
| Pos. drill holes | 20   | 0,79  |

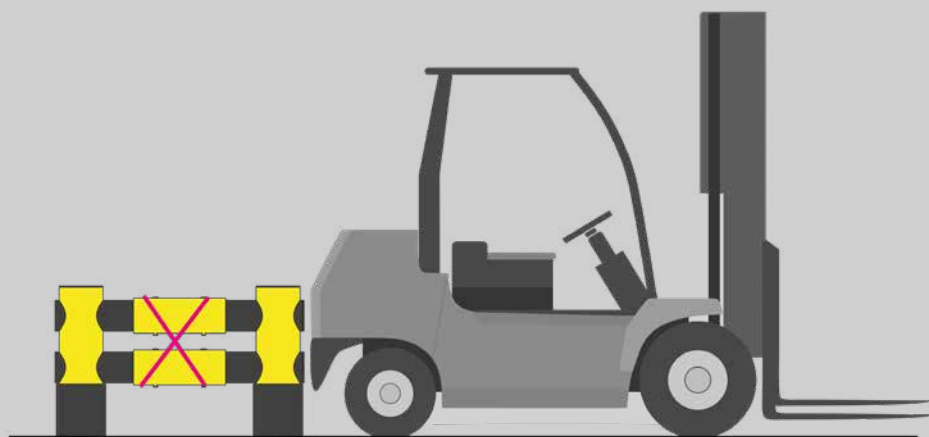

## Max. force to bolt 21 kN

## Impact Test GOLF double rail

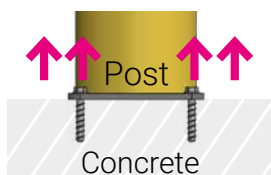

| Mid Rail Max. Energy (Joules) | 90°    | 67,5°  | 45°    | 22,5°  |
|-------------------------------|--------|--------|--------|--------|
|                               | 13.000 | 15.200 | 26.000 | 89.000 |

End post max. energy (Joules) - 90° 4.000



**Sprzedaz i serwis**  
 ul. Marecka 66a  
 05-220 Zielonka  
 +48 22 771 04 56  
 info@topserw.pl  
 www.topserw.pl