


d-flexx





Specifications

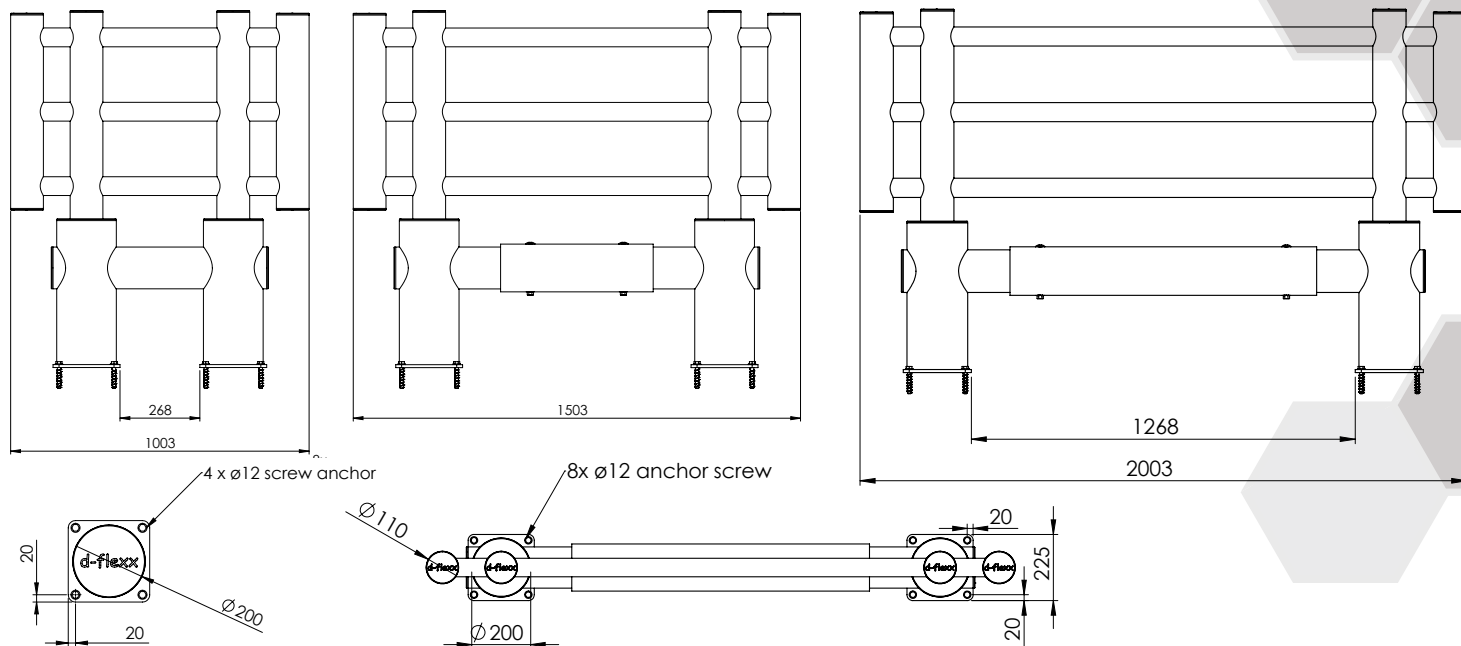


Measurements mm vs in

	mm	in
Diameter 1	200	7,87
Diameter 2	110	4,33
Height	1200	47,24
Width 1	268	10,59
Width 2	1003	39,52
Width 3	1503	59,21
Width 4	1268	49,92
Width 5	2003	78,94
Footplate	225	8,86
Pos. drill holes	20	0,79

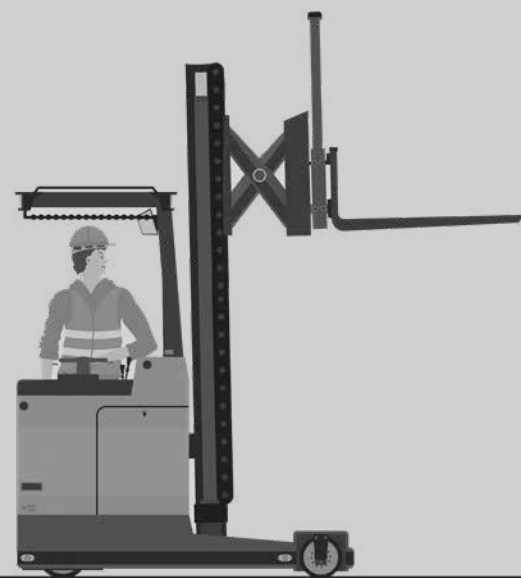

Max. force to bolt 21 kN

Impact Test KILO



Mid Rail Max. Energy (Joules)	90°	67,5°	45°	22,5°
	15.000	17.600	30.000	102.700

End post max. energy (Joules) - 90° 4.000

Mid post max. energy (Joules) - 90° 4.000



Sprzedaz i serwis
 ul. Marecka 66a
 05-220 Zielonka
 +48 22 771 04 56
 info@topserw.pl
 www.topserw.pl