



d-flexx

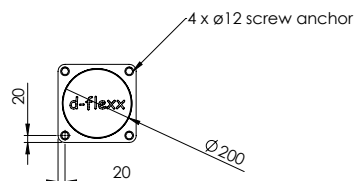

Specifications

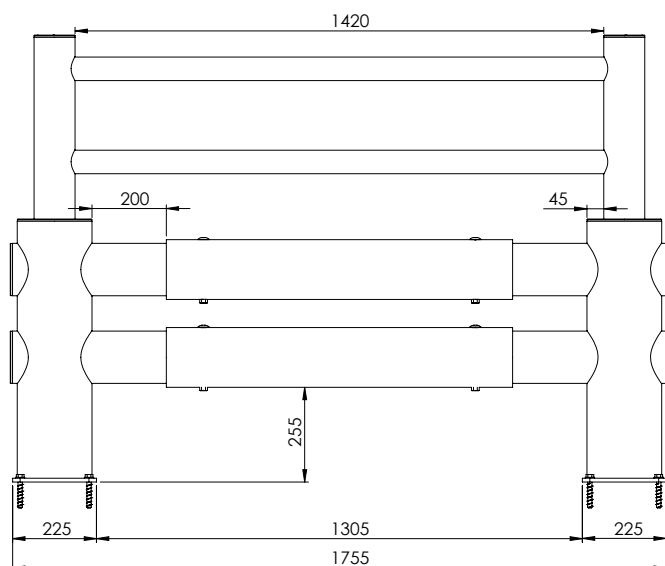


Measurements mm vs in

	mm	in
Diameter	200	7,87
Height	1200	47,24
Space	255	10,04
Width 1	45	1,77
Width 2	200	7,87
Width 3	1305	51,38
Width 4	1755	69,09
Footplate	225	8,86
Pos. drill holes	20	0,79



Max. force to bolt 21 kN

Impact Test LIMA



Mid Rail Max. Energy (Joules)	90°	67,5°	45°	22,5°
	15.000	17.600	30.000	102.700

End post max. energy (Joules) - 90° 4.000

Mid post max. energy (Joules) - 90° 4.000



Sprzedaz i serwis
 ul. Marecka 66a
 05-220 Zielonka
 +48 22 771 04 56
 info@topserw.pl
 www.topserw.pl