


TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Safety Manufacturing assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © SafetyManufacturing, A Morris Group International Brand. Please visit www.safetymfg.com for most current specifications.

Model S2200-FRV : Freeze Resistant, Horizontally Mounted Emergency Shower, Stainless Steel Showerhead

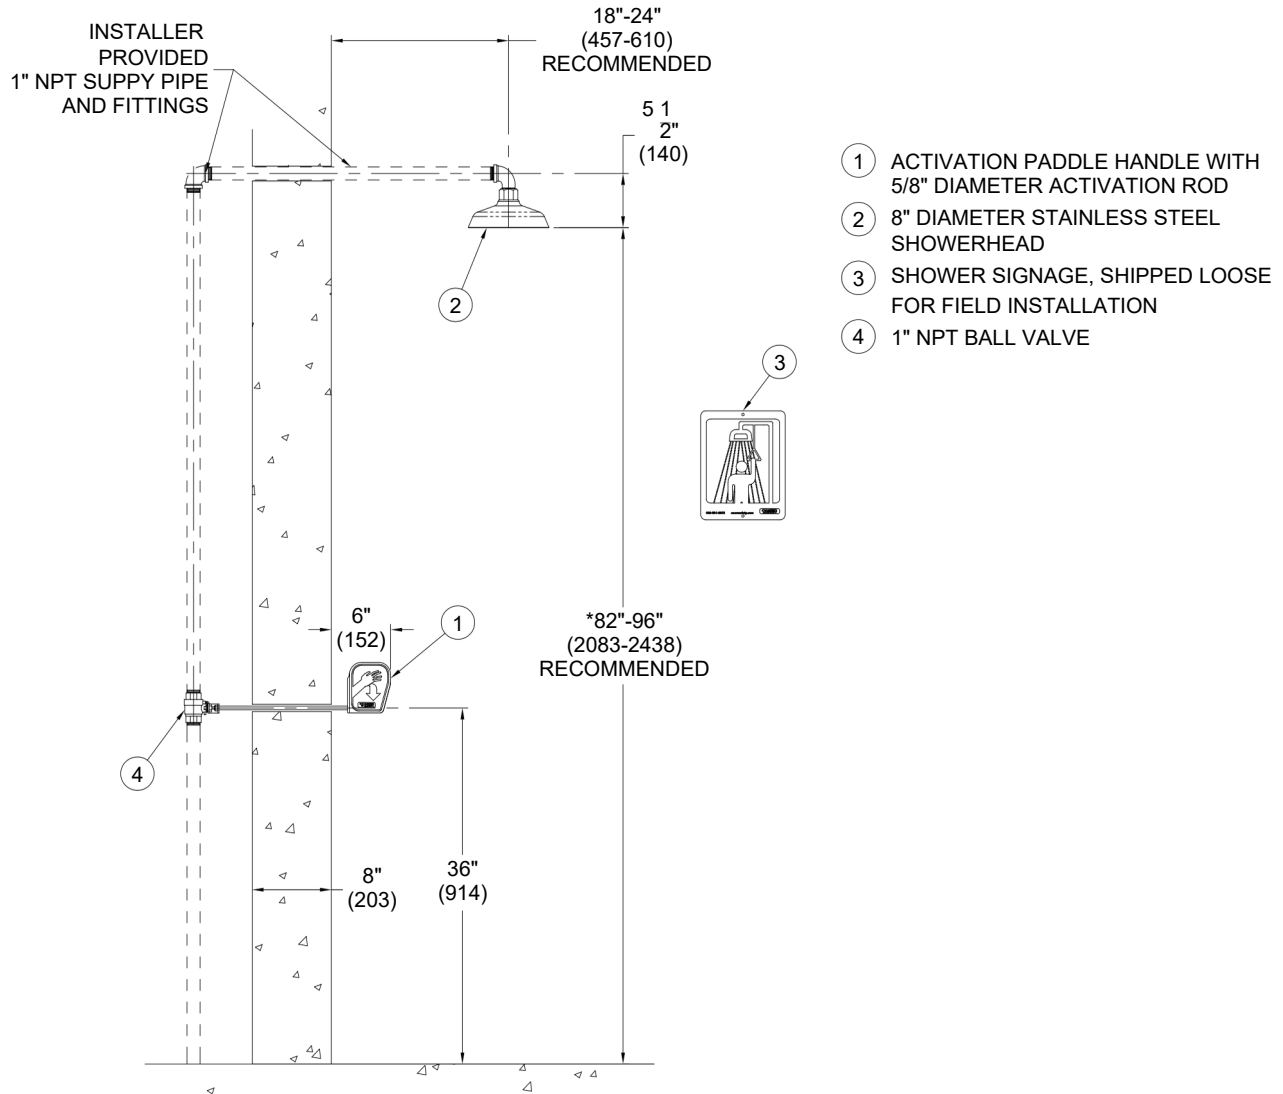

GENERAL NOTES: (ANSIZ358.1STATEMENTSPROVIDEDASREFERENCEONLYAND SUBJECT TO CHANGE.)

1. ALL DIMENSIONS ARE INCHES (MM).

*2. ANSI Z358.1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN MINIMUM 82" (2083) TO MAXIMUM 96" (2438) ABOVE THE FLOOR.

3. ACTIVATION ROD PROVIDED FOR 8" (203mm) WALL OTHER LENGTHS AVAILABLE UPON REQUEST.

4. ANSI Z358.1 REQUIRES SUPPLY WORKING PRESSURE OF 30 PSI TO 80 PSI.

 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

S2200-FRV REV: 11/01/2024

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature _____
(Approval for Manufacturing) _____ Date _____



800-591-9372
www.safetymfg.com