




TECHNICAL DIMENSIONS


All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Safety Manufacturing assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © SafetyManufacturing, A Morris Group International Brand.

Please visit www.safetymfg.com for most current specifications.

• Model S1320-PVC : Combination Station, Plastic Bowl, Eye/Face Wash and Showerhead 23 5



MOUNTING FLANGE DETAIL

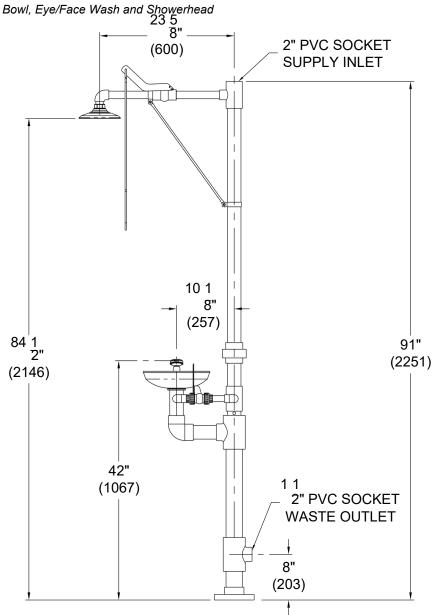

GENERAL NOTES: (ANSI Z358.1 STATEMENTS PROVIDED AS REFERENCE ONLY AND SUBJECT TO CHANGE.)

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. ANSI Z358.1 REQUIRES NOZZLES TO BE BETWEEN 33" 45" [838 1143] ABOVE THE FINISHED FLOOR.
- **3. ANSI Z358.1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN 82" 96" [2083 2438] ABOVE THE FINISHED FLOOR WITH A 16" [406] MINIMUM RADIUS UNOBSTRUCTED.
- 4. ANSI Z358.1 REQUIRES PULL ROD TO BE MOUNTED NO MORE THAN 69" [1752] FROM THE FINISHED FLOOR.
- 5. ANSI Z358.1 REQUIRES SUPPLY WORKING PRESSURE OF 30 PSI TO 80 PSI.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov		\$1320-PVC REV: 11/07/2024	
SUMMARY VAL FOR STURING	Model Number & OptionsCompany	Quantity	SAFETY MANUFACTURING
SELECTION SU & APPROVA MANUFACTI	ContactTitle Signature (Approval for Manufacturing)	Date	800-591-9372 www.safetymfg.com